

INFS 766
Internet Security Protocols

Lectures 7 and 8
IPSEC

Prof. Ravi Sandhu

IPSEC TRAFFIC PROTOCOLS

- ❖ **security extensions for IPv4 and IPv6**
- ❖ **IP Authentication Header (AH)**
 - authentication and integrity of payload and header
- ❖ **IP Encapsulating Security Protocol (ESP)**
 - confidentiality of payload
- ❖ **ESP with optional ICV (integrity check value)**
 - confidentiality, authentication and integrity of payload

© Ravi Sandhu 2002

4

IPSEC ROADMAP

- ❖ **Security Association**
- ❖ **IP AH (Authentication Header) Protocol**
- ❖ **IP ESP (Encapsulating Security Protocol)**
- ❖ **Authentication Algorithm**
- ❖ **Encryption Algorithm**
- ❖ **IKE (Key Exchange)**
- ❖ **[IP Compression Protocol and Algorithms]**

© Ravi Sandhu 2002

2

IPSEC TRAFFIC PROTOCOLS

- ❖ **security services**
 - authentication and integrity
 - confidentiality
 - replay prevention
 - partial traffic flow confidentiality
 - compression
- ❖ **algorithm-independent with standard defaults**
- ❖ **secret-key technology**

© Ravi Sandhu 2002

5

SECURITY DEPENDS UPON

- ❖ **secure protocols but also much more**
 - cryptographic strength
 - implementation quality
 - good random number sources
 - end system security
 - system management
 -

© Ravi Sandhu 2002

3


IPSEC TRAFFIC PROTOCOLS

- ❖ **both IP AH and IP ESP can operate in**
 - **transport mode**
 - end-to-end
 - **tunnel mode**
 - security-gateway to security-gateway
- ❖ **transport mode and tunnel model can coexist**

© Ravi Sandhu 2002

6

IP TUNNELING

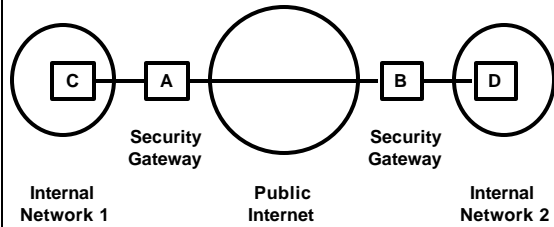

© Ravi Sandhu 2002

7


IPSEC SECURITY ASSOCIATION (SA)

- ❖ referenced by a 32 bit security parameter index (SPI) carried in each IPSEC packet
- ❖ SA for an IP packet is uniquely identified by
 - SPI
 - destination address
 - security protocol (AH or ESP)

© Ravi Sandhu 2002

10

IP TUNNELING

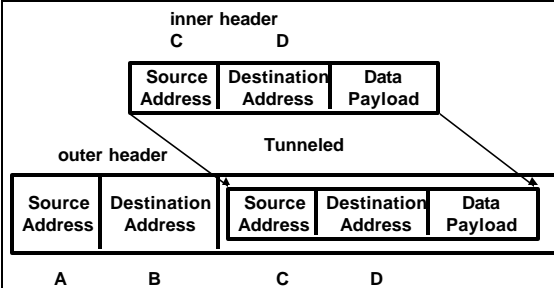

© Ravi Sandhu 2002

8

IPSEC SECURITY ASSOCIATION (SA)

- ❖ sequence number counter: 32 bit
- ❖ overflow flag: indicating abort or not on overflow
- ❖ anti-replay window
- ❖ AH information: algorithm, key, key lifetime
- ❖ ESP information:
 - encryption: algorithm, key, key lifetime
 - authentication: algorithm, key, key lifetime
- ❖ lifetime of SA
- ❖ IPSEC protocol mode: transport, tunnel, wildcard
- ❖ path MTU (maximum transmission unit)

© Ravi Sandhu 2002

11


IPSEC SECURITY ASSOCIATION (SA)

- ❖ SA is a one-directional relationship between sender and receiver
- ❖ SA applies to AH or ESP but not both
- ❖ two-way secure exchange of IP packets requires two (or more) SAs
- ❖ unicast (multicast will come later)
- ❖ SAs are established by
 - management protocols (IKE)
 - manually

© Ravi Sandhu 2002

9

IPSEC KEYING (SA) GRANULARITY

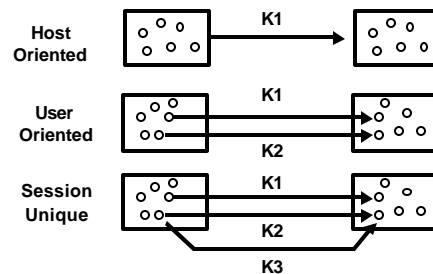

© Ravi Sandhu 2002

12

IP AUTHENTICATION HEADER

- ❖ IPv4 and IPv6 packets
 - data origin authentication
 - data integrity
 - replay prevention (optional as per SA)
- ❖ MAC on IP packet header and data payload
- ❖ IP header fields that change hop-by-hop set to 0 for MAC computation

© Ravi Sandhu 2002

13

IP AUTHENTICATION HEADER FIELDS

- ❖ next header: 8 bit protocol field
- ❖ length: 8 bit field specifying length of authentication data in 32 bit words
- ❖ unused: 16 bit set to 0
- ❖ SPI: 32 bit
- ❖ sequence number: 32 bit
- ❖ integrity check value (ICV): some multiple of 32 bits, e.g., 96, 128, 160
 - must support HMAC-MD5-96, HMAC-SHA-1-96

© Ravi Sandhu 2002

16

IP AH TRANSPORT MODE



- ❖ protocol field of IP header is 51 (for AH payload)
- ❖ AH in turn contains protocol field specifying protocol of actual payload, e.g., TCP or UDP or ICMP or IP

© Ravi Sandhu 2002

14


IP AUTHENTICATION HEADER

- ❖ prevents IP spoofing attacks
 - at performance cost
- ❖ prevents replay attacks
 - sequence number added in revision
- ❖ can be widely and strongly deployed without concern of crypto-politics

© Ravi Sandhu 2002

17

IP AH TUNNEL MODE



- ❖ IP AH is a single protocol
- ❖ transport or tunnel mode is determined by SA
 - actually SA can allow both

© Ravi Sandhu 2002

15

ANTI-REPLAY MECHANISM

- ❖ Sequence number starts at 1 and cannot go past $2^{32}-1$
- ❖ receiver keeps a window of min size 32 (64 preferred, larger is ok)
 - packets to left of window are discarded
 - repeated packets within window are discarded
 - authentic packets to right of window cause window to move right

© Ravi Sandhu 2002

18

IP ENCAPSULATING SECURITY PAYLOAD (ESP)

- ❖ IPv4 and IPv6
 - ESP: data confidentiality
 - ESP w/Auth: data confidentiality, authentication, integrity
 - ESP w/Auth is an option within ESP
- ❖ ESP header (cleartext)
 - security parameter index (SPI)
 - sequence number: 32 bit
 - Initial Value for CBC
- ❖ ESP trailer (encrypted)
 - padding
 - next header (identifies payload protocol)
- ❖ ESP w/Auth authentication
 - ICV: for authentication option
 - applies only to encrypted payload and not to header

© Ravi Sandhu 2002

19


ESP

- ❖ protocol 50
 - ESP w/Auth determined by SA
- ❖ ESP header
 - SPI, IV in cleartext
- ❖ ESP trailer
 - padding info, payload protocol is encrypted
- ❖ tunnel mode provides partial traffic flow confidentiality

© Ravi Sandhu 2002

22

ESP TUNNELING MODE

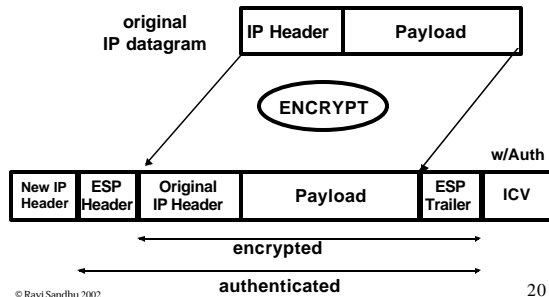


© Ravi Sandhu 2002

20

INTERNET KEY EXCHANGE (IKE)


- ❖ Hybrid protocol

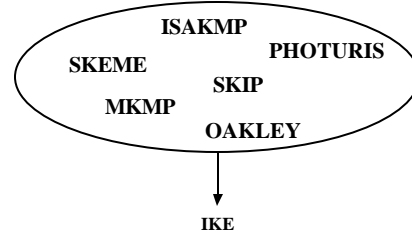

© Ravi Sandhu 2002

23

ESP TRANSPORT MODE

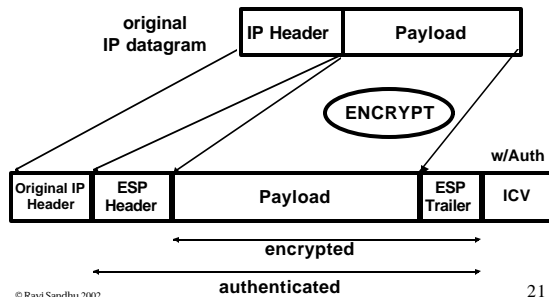

© Ravi Sandhu 2002

21

ISAKMP

- ❖ Internet security association and key management protocol
- ❖ separates key management from key exchanges
- ❖ complex general protocol used in a specific way in IKE
 - can apply to protocols other than IPSEC
- ❖ for IPSEC uses UDP over IP

© Ravi Sandhu 2002

24

IKE

- ❖ **ISAKMP phase 1: establishes ISAKMP SA**
 - Main mode (DH with identity protection)
 - Aggressive mode (DH without identity protection)
- ❖ **Between phases**
 - New group mode
- ❖ **ISAKMP phase 2: establishes SA for target protocol**
 - Quick mode

© Ravi Sandhu 2002

25

PHASE 1 AUTHENTICATION ALTERNATIVES

- ❖ **public-key signature**
- ❖ **preshared-key**
- ❖ **public-key encryption**
- ❖ **revised public-key encryption**

© Ravi Sandhu 2002

28

DIFFIE-HELLMAN KEY ESTABLISHMENT

A $y_A = a^{x_A} \bmod p$ public key $y_B = a^{x_B} \bmod p$ public key **B**

private key x_A private key x_B

$k = y_B^{x_A} \bmod p = y_A^{x_B} \bmod p = a^{x_A x_B} \bmod p$

system constants: p: prime number, a: integer

© Ravi Sandhu 2002

26

COOKIE EXCHANGE

- ❖ Phase 1 employs cookie exchange to thwart (not prevent) denial of service attacks
- ❖ **A -> B: Cookie_Request**
 - A's cookie, 64 bit random number
- ❖ **B -> A: Cookie_Response**
 - includes A and B's cookies
- ❖ all further Phase 1 and Phase 2 messages include both cookies
 - ISAKMP SA is identified by both cookies
 - IPSEC protocol SA is identified by SPI

© Ravi Sandhu 2002

29

PERFECT FORWARD SECRECY

- ❖ **Use a different DH key-pair on each exchange**
- ❖ **DH public keys need to be authenticated**
 - authentication can be done by many techniques
- ❖ **Loss of long-term (authentication) keys does not disclose session keys**

© Ravi Sandhu 2002

27

COOKIE GENERATION

- ❖ **hash over**
 - IP Source and Destination Address
 - UDP Source and Destination Ports
 - a locally generated random secret
 - timestamp

© Ravi Sandhu 2002

30

IKE DEFAULT OAKLEY DH GROUPS

- ❖ **Group 1**
 - > MODP, 768 bit prime p, g=2
- ❖ **Group 2**
 - > MODP, 1024 bit prime p, g=2
- ❖ **Group 3**
 - > EC2N, 155 bit field size
- ❖ **Group 4**
 - > EC2N, 185 bit field size
- ❖ private groups can be used

SKEYS, HASH AND SIG

```
SKEYID_d = prf(SKEYID, g^xy | CKY-I | CKY-R | 0)
SKEYID_a = prf(SKEYID, SKEYID_d | g^xy | CKY-I | CKY-R | 1)
SKEYID_e = prf(SKEYID, SKEYID_a | g^xy | CKY-I | CKY-R | 2)
```

```
HASH_I = prf(SKEYID, g^xi | g^xr | CKY-I | CKY-R | SAI_b | IDii_b)
HASH_R = prf(SKEYID, g^xr | g^xi | CKY-R | CKY-I | SAI_b | IDir_b)
```

HASH_I and HASH_R used directly for MAC authentication OR digitally signed by SIG_I and SIG_R

IKE NOTATION

HDR	ISAKMP header whose exchange type is the mode
HDR*	indicates payload encryption
SA	SA negotiation payload, initiator MAY provide multiple proposals, responder replies with one
<P>_b	body of payload <P>
SAI_b	body of the SA payload (minus generic headers)
CKY-I	Initiator's cookie
CKY-R	Responder's cookie
g^xi	initiator's DH public value
g^xr	responder's DH public value
g^xy	Diffie-Hellman shared secret
KE	key exchange containing DH public values
Ni	initiator nonce
Nr	responder nonce
IDii	identification payload for ISAKMP initiator
IDir	identification payload for ISAKMP responder
SIG	signature payload, data signed varies
CERT	certificate payload
HASH	hash payload

MAIN MODE WITH DIGITAL SIGNATURES

Initiator		Responder
HDR, SA	-->	
	<--	HDR, SA
HDR, KE, Ni	-->	
	<--	HDR, KE, Nr
HDR*, IDii, [CERT,] SIG_I	-->	
	<--	HDR*, IDir, [CERT,] SIG_R

SKEYID = prf(Ni_b | Nr_b, g^xy)

IKE NOTATION

prf(key, msg) keyed pseudo-random function (often MAC)

SKEYID string derived from secret material known only to the active players in the exchange

SKEYID_e keying material used by the ISAKMP SA to protect confidentiality of its messages.

SKEYID_a keying material used by the ISAKMP SA to protect authentication of its messages.

SKEYID_d keying material used to derive keys for non-ISAKMP SAs

<>y "x" is encrypted with the key "y"

--> initiator to responder

<-- responder to initiator

| concatenation of information

[x] indicates that x is optional

AGGRESSIVE MODE WITH DIGITAL SIGNATURES

Initiator		Responder
HDR, SA, KE, Ni, IDii	-->	
	<--	HDR, SA, KE, Nr, IDir, [CERT,] SIG_R
HDR, [CERT,] SIG_I	-->	

SKEYID = prf(Ni_b | Nr_b, g^xy)

MAIN AND AGGRESSIVE MODE WITH PRE-SHARED KEY

```

MAIN MODE
Initiator                               Responder
-----                               -
HDR, SA                                 -->
<-- HDR, SA
HDR, KE, Ni                             -->
<-- HDR, KE, Nr
HDR*, IDii, HASH_I                       -->
<-- HDR*, IDir, HASH_R

AGGRESSIVE MODE
Initiator                               Responder
-----                               -
HDR, SA, KE, Ni, IDii -->
<-- HDR, SA, KE, Nr, IDir, HASH_R
HDR, HASH_I                             -->
<--

SKEYID = prf(pre-shared-key, Ni_b | Nr_b)

```

© Ravi Sandhu 2002

37

AUTHENTICATION WITH PUBLIC-KEY ENCRYPTION

- ❖ does not provide non-repudiation
- ❖ provides additional security since attacked must break both
 - DH key exchange
 - public-key encryption
- ❖ provides identity protection in aggressive mode
- ❖ revised protocol reduces public-key operations

© Ravi Sandhu 2002

40

MAIN MODE WITH PUBLIC KEY ENCRYPTION

```

Initiator                               Responder
-----                               -
HDR, SA                                 -->
<-- HDR, SA
HDR, KE, [ HASH(1), ]
<IDii_b>PubKey_r,
<Ni_b>PubKey_r                             -->
<-- HDR, KE, <IDir_b>PubKey_i,
<Nr_b>PubKey_i
HDR*, HASH_I                             -->
<-- HDR*, HASH_R

HASH(1) is hash of responder's certificate

SKEYID = prf(hash(Ni_b | Nr_b), CKY-I | CKY-R)

```

© Ravi Sandhu 2002

38

MAIN MODE WITH REVISED PUBLIC KEY ENCRYPTION

```

Initiator                               Responder
-----                               -
HDR, SA                                 -->
<-- HDR, SA
HDR, [ HASH(1), ]
<Ni_b>Pubkey_r,
<KE_b>Ke_i,
<IDii_b>Ke_i,
[<Cert-I_b>Ke_i]                             -->
<-- HDR, <Nr_b>PubKey_i,
<KE_b>Ke_r,
<IDir_b>Ke_r,
HDR*, HASH_I                             -->
<-- HDR*, HASH_R

```

© Ravi Sandhu 2002

41

AGGRESSIVE MODE WITH PUBLIC KEY ENCRYPTION

```

Initiator                               Responder
-----                               -
HDR, SA, [ HASH(1), ] KE,
<IDii_b>Pubkey_r,
<Ni_b>Pubkey_r                             -->
<-- HDR, SA, KE, <IDir_b>PubKey_i,
<Nr_b>PubKey_i, HASH_R
HDR, HASH_I                             -->
<--

Provides identity protection

HASH(1) is hash of responder's certificate

SKEYID = prf(hash(Ni_b | Nr_b), CKY-I | CKY-R)

```

© Ravi Sandhu 2002

39

MAIN MODE WITH REVISED PUBLIC KEY ENCRYPTION

$$Ne_i = \text{prf}(Ni_b, CKY-I)$$

$$Ne_r = \text{prf}(Nr_b, CKY-R)$$

Ke_i is leftmost 320 bits of K1 | K2 | K3 where
 $K1 = \text{prf}(Ne_i, 0)$
 $K2 = \text{prf}(Ne_i, K1)$
 $K3 = \text{prf}(Ne_i, K2)$

Similarly for Ke_r

© Ravi Sandhu 2002

42

AGGRESSIVE MODE WITH REVISED PUBLIC KEY ENCRYPTION

Initiator	Responder
<pre>HDR, SA, [HASH(1), <Ni_b>Pubkey_r, <KE_b>Ke_i, <IDi_b>Ke_i [, <Cert-I_b>Ke_i] --></pre>	<pre>HDR, SA, <Nr_b>PubKey_i, <KE_b>Ke_r, <IDr_b>Ke_r, HASH_R --></pre>
<pre>HDR, HASH_I</pre>	

© Ravi Sandhu 2002

43

PHASE 2 QUICK MODE

Additional key material can be generated if needed as follows

```
KEYMAT = K1 | K2 | K3 | ...
where
K1 = prf(SKEYID_d, [ g(qm)^xy | ] protocol | SPI | Ni_b | Nr_b)
K2 = prf(SKEYID_d, K1 | [ g(qm)^xy | ] protocol | SPI | Ni_b | Nr_b)
K3 = prf(SKEYID_d, K2 | [ g(qm)^xy | ] protocol | SPI | Ni_b | Nr_b)
etc.
```

© Ravi Sandhu 2002

46

PHASE 2 QUICK MODE

Initiator	Responder
<pre>HDR*, HASH(1), SA, Ni [, KE] [, IDci, IDcr] --></pre>	<pre>--> HDR*, HASH(2), SA, Nr [, KE] [, IDci, IDcr]</pre>
<pre>HDR*, HASH(3)</pre>	<pre>--></pre>

© Ravi Sandhu 2002

44

```
HASH(1) = prf(SKEYID_a, M-ID | SA | Ni [ [ KE ] [ [ IDci | IDcr ] ] )
HASH(2) = prf(SKEYID_a, M-ID | Ni_b | SA | Nr [ [ KE ] [ [ IDci | IDcr ] ] )
HASH(3) = prf(SKEYID_a, 0 | M-ID | Ni_b | Nr_b)
```

PHASE 2 QUICK MODE

Multiple SA's and keys can be negotiated with one exchange as follows:

Initiator	Responder
<pre>HDR*, HASH(1), SA0, SA1, Ni, [, KE] [, IDci, IDcr] --></pre>	<pre>--> HDR*, HASH(2), SA0, SA1, Nr, [, KE] [, IDci, IDcr]</pre>
<pre>HDR*, HASH(3)</pre>	<pre>--></pre>

Results in 4 security associations-- 2 each way for both SA0 and SA1

© Ravi Sandhu 2002

47

PHASE 2 QUICK MODE

If no PFS there is no KE payload and new keying material is

```
KEYMAT = prf(SKEYID_d, protocol | SPI | Ni_b | Nr_b).
```

If PFS there is KE payload and new keying material is

```
KEYMAT = prf(SKEYID_d, g(qm)^xy | protocol | SPI | Ni_b | Nr_b)
```

where $g(qm)^{xy}$ is the shared secret from the ephemeral DH exchange of this Quick Mode (which must then be deleted)

In either case, "protocol" and "SPI" are from the ISAKMP Proposal Payload that contained the negotiated Transform.

Two SAs are established
One in each direction
Keys are different because of different SPIs

© Ravi Sandhu 2002

45

NEW GROUP MODE

- ❖ sandwiched between phase 1 and 2
- ❖ group can be negotiated in phase 1
- ❖ new group mode allows nature of group to be hidden
 - in phase 1 only group id is communicated in clear

© Ravi Sandhu 2002

48

NEW GROUP MODE

```
Initiator          Responder
-----
HDR*, HASH(1), SA  -->
                   <-- HDR*, HASH(2), SA
```


```
HASH(1) = prf( SKEYID_a, M-ID | SA)
HASH(2) = prf( SKEYID_a, M-ID | SA)
```

VPN TECHNOLOGIES

- ❖ IPSEC
 - > layer 3 VPN (standards based), layer 2 VPN (proprietary)
- ❖ PPTP (Point-to-point tunneling protocol)
 - > Microsoft layer 2 VPN, built in security with known flaws
- ❖ L2F (layer 2 forwarding)
 - > Cisco layer 2 VPN, no security, phasing out
- ❖ L2TP (layer 2 tunneling protocol)
 - > emerging IETF standard, needs IPSEC security
- ❖ SSL (layer 4 tunnel)
 - > proprietary approaches, tunnel IP over SSL-protected TCP

VIRTUAL PRIVATE NETWORKS

VIRTUAL PRIVATE NETWORKS

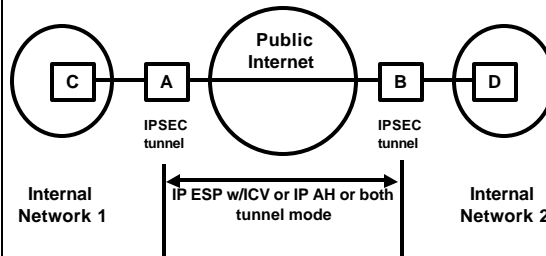


VPNs

- ❖ VPNs are used to securely connect networks using tunnels (virtual circuits) over the Internet
- ❖ Secure remote access is used to securely connect a single computer using tunnels (virtual circuits) over the Internet

WHAT IS TUNNELED

- ❖ IPSEC tunnel can be used to tunnel
 - > IP packets
 - IPSEC standard approach
 - > layer 2 packets
 - virtual switched LAN (VSLAN)
 - proprietary approaches

VIRTUAL PRIVATE NETWORKS

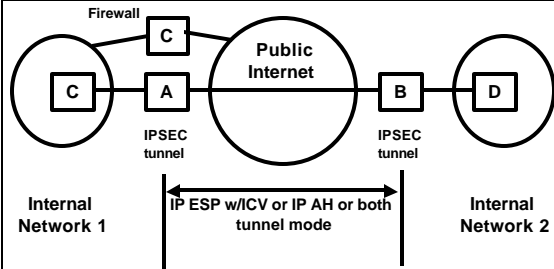

© Ravi Sandhu 2002

55


PPTP VPNs

- ❖ **Voluntary tunneling**
 - PPTP tunnel from client to network
- ❖ **Compulsory tunneling**
 - PPTP tunnel from ISP to network
 - client to ISP dial-in via PPP is unprotected

© Ravi Sandhu 2002

58

SECURE REMOTE ACCESS

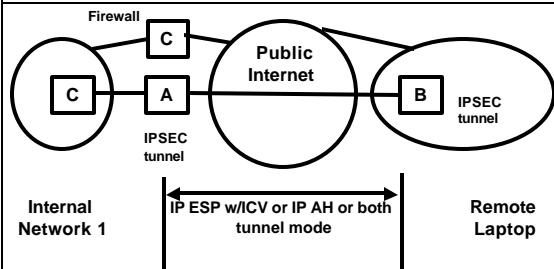

© Ravi Sandhu 2002

56

PPTP VPNs

- ❖ **Originally intended for secure remote access**
- ❖ **enhancements for network to network VPNs**
- ❖ **known security flaws**
 - remedied in version 2

© Ravi Sandhu 2002

57